

CARRIZO-WILCOX AQUIFER SUMMARY, 2010

AQUIFER SAMPLING AND ASSESSMENT PROGRAM



APPENDIX 2 TO THE 2012 TRIENNIAL SUMMARY REPORT
PARTIAL FUNDING PROVIDED BY THE CWA



Contents

BACKGROUND	4
GEOLOGY	4
HYDROGEOLOGY	5
PROGRAM PARAMETERS.....	5
INTERPRETATION OF DATA	6
Field and Conventional Parameters	6
Inorganic Parameters	7
Volatile Organic Compounds.....	7
Semi-Volatile Organic Compounds	7
Pesticides and PCBs	7
WATER QUALITY TRENDS AND COMPARISON TO HISTORICAL ASSET DATA.....	8
SUMMARY AND RECOMMENDATIONS.....	8
Table 2-1: List of Wells Sampled, Carrizo-Wilcox Aquifer–FY 2010.....	9
Table 2-2: Summary of Field and Conventional Data, Carrizo-Wilcox Aquifer–FY 2010.....	10
Table 2-3: Summary of Inorganic Data, Carrizo-Wilcox Aquifer–FY 2010	11
Table 2-4: FY 2010 Field and Conventional Statistics, ASSET Wells	12
Table 2-5: FY 2010 Inorganic Statistics, ASSET Wells	12
Table 2-6: Triennial Field and Conventional Statistics, ASSET Wells	13
Table 2-7: Triennial Inorganic Statistics, ASSET Wells	13
Table 2-8: VOC Analytical Parameters	14
Table 2-9: SVOC Analytical Parameters	15
Table 2-10: Pesticides and PCBs	16
Figure 2-1: Location Plat, Carrizo-Wilcox Aquifer	17
Figure 2-2: Map of pH Data	18
Figure 2-3: Map of TDS Lab Data.....	19
Figure 2-4: Map of Chloride Data	19
Figure 2-5: Map of Iron Data.....	20
Chart 2-1: Temperature Trend	21
Chart 2-2: pH Trend.....	21
Chart 2-3: Field Specific Conductance Trend.....	22
Chart 2-4: Lab Specific Conductance Trend.....	22

Chart 2-5: Field Salinity Trend23

Chart 2-6: Alkalinity Trend23

Chart 2-7: Chloride Trend24

Chart 2-8: Color Trend24

Chart 2-9: Sulfate (SO4) Trend.....25

Chart 2-10: Total Dissolved Solids (TDS) Trend25

Chart 2-11: Ammonia (NH3) Trend.....26

Chart 2-12: Hardness Trend26

Chart 2-13: Nitrite – Nitrate Trend27

Chart 2-14: TKN Trend27

Chart 2-15: Total Phosphorus Trend28

Chart 2-16: Iron Trend28



BACKGROUND

The Louisiana Department of Environmental Quality's (LDEQ) Aquifer Sampling and Assessment Program (ASSET) is an ambient monitoring program established to determine and monitor the quality of groundwater produced from Louisiana's major freshwater aquifers. The ASSET Program samples approximately 200 water wells located in 14 aquifers and aquifer systems across the state. The sampling process is designed so that all fourteen aquifers and aquifer systems are monitored on a rotating basis, within a three-year period so that each well is monitored every three years.

In order to better assess the water quality of a particular aquifer, an attempt is made to sample all ASSET Program wells producing from it in a narrow time frame. To more conveniently and economically promulgate those data collected, a summary report on each aquifer is prepared separately. Collectively, these aquifer summaries will make up, in part, the ASSET Program's Triennial Summary Report for 2012.

Analytical and field data contained in this summary were collected from wells producing from the Carrizo-Wilcox aquifer, during the 2010 state fiscal year (July 1, 2009 - June 30, 2010). This summary will become Appendix 2 of ASSET Program Triennial Summary Report for 2012.

These data show that in September and November 2006, 12 wells were sampled which produce from the Carrizo-Wilcox aquifer. Four of these 12 are classified as public supply, 2 are classified as industrial, 2 as irrigation, and 4 domestic. The wells are located in six parishes in the northwest area of the state.

Figure 2-1 shows the geographic locations of the Carrizo-Wilcox aquifer and the associated wells, whereas Table 2-1 lists the wells in the aquifer along with their total depths, use made of produced waters, and date sampled.

Well data for registered water wells were obtained from the Louisiana Department of Transportation and Development's Water Well Registration Data file.

GEOLOGY

The Carrizo-Wilcox aquifer system consists of the Carrizo Sand of the Eocene Claiborne group and the undifferentiated Wilcox group of Eocene and Paleocene age. The Wilcox deposits, outcropping in northwestern Louisiana, are the oldest deposits in the state containing fresh water. The Carrizo is discontinuous and consists of well-sorted, fine to medium grained, cross-bedded sands, with some silt and lignite. Well yields are restricted because the sand beds are typically thin, lenticular and fine textured. The system is confined down-dip by the clays and silty clays of the overlying Cane River formation and the regionally confining clays of the underlying Midway group.

HYDROGEOLOGY

Primary recharge of the Carrizo-Wilcox aquifer occurs from direct infiltration of rainfall in interstream, upland outcrop-subcrop areas. Water also moves between overlying alluvial and terrace aquifers, the Sparta aquifer, and the Carrizo-Wilcox aquifer, according to hydraulic head differences. Water level fluctuations are mostly seasonal, and the hydraulic conductivity varies between 2 and 40 feet/day.

The maximum depths of occurrence of fresh water in the Carrizo-Wilcox range from 200 feet above sea level to 1,100 feet below sea level. The range of thickness of the fresh water interval in the Carrizo-Wilcox is 50 to 850 feet. The depths of the Carrizo-Wilcox wells that were monitored in conjunction with the ASSET Program range from 105 to 410 feet below land surface.

PROGRAM PARAMETERS

The field parameters checked at each ASSET well sampling site and the list of conventional parameters analyzed in the laboratory are shown in Table 2-2. The inorganic (total metals) parameters analyzed in the laboratory are listed in Table 2-3. These tables also show the field and analytical results determined for each analyte. For quality control, duplicate samples were taken for each parameter at wells BO-274, CD-642, and DS-384.

In addition to the field, conventional and inorganic analytical parameters, the target analyte list includes three other categories of compounds: volatiles, semi-volatiles, and pesticides/PCBs. Due to the large number of analytes in these categories, tables were not prepared showing the analytical results for these compounds. A discussion of any detections from any of these three categories, if necessary, can be found in their respective sections. Tables 2-8, 2-9 and 2-10 list the target analytes for volatiles, semi-volatiles and pesticides/PCBs, respectively.

Tables 2-4 and 2-5 provide a statistical overview of field and conventional data, and inorganic data for the Carrizo-Wilcox aquifer, listing the minimum, maximum, and average results for these parameters collected in the FY 2010 sampling. Tables 2-6 and 2-7 compare these same parameter averages to historical ASSET-derived data for the Carrizo-Wilcox aquifer, from fiscal years 1995, 1998, 2001, 2004, and 2007.

The average values listed in the above referenced tables are determined using all valid, reported results, including non-detects. Per Departmental policy concerning statistical analysis, one-half of the detection limit (DL) is used in place of zero when non-detects are encountered. However, the minimum value is reported as less than the DL, not one-half the DL. If all values for a particular analyte are reported as non-detect, then the minimum, maximum, and average values are all reported as less than the DL. For contouring purposes, one-half the DL is also used for non-detects in the figures and charts referenced below.

Figures 2-2, 2-3, 2-4, and 2-5 respectively, represent the contoured average values for pH, TDS, chloride and iron. Charts 2-1 through 2-16 represent the trend of the graphed parameter, based on the averaged value of that parameter for each three-year reporting period. Discussion

of historical data and related trends is found in the **Water Quality Trends and Comparison to Historical ASSET Data** section.

INTERPRETATION OF DATA

Under the Federal Safe Drinking Water Act, EPA has established maximum contaminant levels (MCLs) for pollutants that may pose a health risk in public drinking water. An MCL is the highest level of a contaminant that EPA allows in public drinking water. MCLs ensure that drinking water does not pose either a short-term or long-term health risk. While not all wells sampled were public supply wells, the ASSET Program uses MCLs as a benchmark for further evaluation.

EPA has also set Secondary MCLs (SMCLs), which are defined as non-enforceable taste, odor, or appearance guidelines. Field and laboratory data contained in Tables 2-2 and 2-3 show that one or more SMCLs were exceeded in 11 of the 12 wells sampled in the Carrizo-Wilcox aquifer, with a total of 18 SMCLs being exceeded.

Field and Conventional Parameters

Table 2-2 shows the field and conventional parameters for which samples are collected at each well and the analytical results for those parameters. Table 2-4 provides an overview of this data for the Carrizo-Wilcox aquifer, listing the minimum, maximum, and average results for these parameters.

Federal Primary Drinking Water Standards: A review of the analysis listed in Table 2-2 shows that no MCL was exceeded for field, water quality, or nutrients parameters for this reporting period. Those ASSET wells reporting turbidity levels greater than 1.0 NTU do not exceed the MCL of 1.0, as this standard applies to public supply water wells that are under the direct influence of surface water. The Louisiana Department of Health and Hospitals has determined that no public water supply well in Louisiana was in this category.

Federal Secondary Drinking Water Standards: A review of the analysis listed in Table 2-2 shows that 9 wells exceeded the SMCL for pH, 5 wells exceeded the SMCL for total dissolved solids, and 1 exceeded the SMCL for color. Laboratory results override field results in exceedance determinations, thus only lab results will be counted in determining SMCL exceedance numbers for TDS. Following is a list of SMCL parameter exceedances with well number and results:

pH (SMCL = 6.5 – 8.5 Standard Units):

BI-236 – 8.84 SU	BO-7274Z – 8.68 SU
CD-453 – 8.75 SU	CD-639 – 8.62
DS-384 – 8.78 SU, Duplicate – 8.78 SU	DS-5297Z – 8.61
DS-5996Z – 8.55 SU	RR-5070Z – 5.76
SA-522 – 8.65 SU	

Total Dissolved Solids (TDS) (SMCL = 500 mg/L or 0.5 g/L):

	<u>LAB RESULTS (in mg/L)</u>	<u>FIELD MEASURES (in g/L)</u>
BI-236	687 mg/L	0.731 g/L
BO-7274Z	940 mg/L	0.937 g/L
CD-453	738 mg/L	0.740 g/L
CD-639	758 mg/L	0.760 g/L
DS-5297Z	913 mg/L	0.988 g/L

Color (SMCL = 15 color units (PCU)):

BI-236 – 16.0 PCU

Inorganic Parameters

Table 2-3 shows the inorganic (total metals) parameters for which samples are collected at each well and the analytical results for those parameters. Table 2-5 provides an overview of inorganic data for the Carrizo-Wilcox aquifer, listing the minimum, maximum, and average results for these parameters.

Federal Primary Drinking Water Standards: A review of the analyses listed on Table 2-3 shows that no MCL was exceeded for total metals.

Federal Secondary Drinking Water Standards: Laboratory data contained in Table 2-3 shows that 3 wells exceeded the SMCL for iron:

Iron (SMCL = 300 ug/L):

BO-274 – 2,510 ug/L, Duplicate – 2,400
CD-639 – 1,020 ug/L

CD-630 – 1,000 ug/L

Volatile Organic Compounds

Table 2-8 shows the volatile organic compound (VOC) parameters for which samples are collected at each well. Due to the number of analytes in this category, analytical results are not tabulated; however, any detection of a VOC would be discussed in this section.

Chloromethane, a common laboratory contaminant, was detected at very low levels in the field blank and 2 of the 12 wells sampled for the Carrizo-Wilcox aquifer. Considering this, it was determined that the reported chloromethane was due to lab contamination and not due to contamination of the 2 wells, and therefore is rejected as invalid. No other VOCs were detected during the FY 2010 sampling of the Carrizo-Wilcox aquifer.

Semi-Volatile Organic Compounds

Table 2-9 shows the semi-volatile organic compound (SVOC) parameters for which samples are collected at each well. Due to the number of analytes in this category, analytical results are not tabulated; however, any detection of a SVOC would be discussed in this section.

The SVOC Bis(2-Ethylhexyl) Phthalate (BEHP), a common lab/field contaminant, was detected in the field blank and in 1 of the 12 wells sampled for the Carrizo-Wilcox aquifer. Considering this, it was determined that the reported BEHP was due to lab contamination and not contamination of the well, and therefore is rejected as invalid. No other SVOC was detected during the FY 2010 sampling of the Carrizo-Wilcox aquifer.

Pesticides and PCBs

Table 2-10 shows the pesticide and PCB parameters for which samples are collected at each well. Due to the number of analytes in this category, analytical results are not tabulated; however, any detection of a pesticide or PCB would be discussed in this section.

No pesticide or PCB was detected at or above its detection limit during the FY 2010 sampling of the Carrizo-Wilcox aquifer.

WATER QUALITY TRENDS AND COMPARISON TO HISTORICAL ASSET DATA

Analytical and field data show that the quality and characteristics of groundwater produced from the Carrizo-Wilcox aquifer exhibit some changes when comparing current data to that of the five previous sampling rotations (three, six, nine, twelve and fifteen years prior). These comparisons can be found in Tables 2-6 and 2-7, and in Charts 2-1 to 2-16 of this summary. Over the fifteen-year period, 8 analytes have shown a general increase in their average concentrations. These analytes are: pH, specific conductance (field and lab), salinity, alkalinity, chloride, TDS, total phosphorous, and barium. For this same time period, 9 analytes have demonstrated a decrease in their average concentrations: temperature, color, sulfate, ammonia, hardness, nitrate-nitrite, TKN, iron, and copper. The remaining analytes have shown no consistent change in their average concentrations for this time period.

The current number of wells with SMCL exceedances, and the current total number of SMCL exceedances have increased from the previous sampling event in FY 2007. Current sample results show that 11 wells reported one or more SMCL exceedances with a total of 18 SMCL exceedances. The FY 2007 sampling of the Carrizo-Wilcox aquifer shows that 9 wells reported one or more SMCL exceedances with a total of 13 exceedances.

SUMMARY AND RECOMMENDATIONS

In summary, the data show that the groundwater produced from this aquifer is soft¹ and is of good quality when considering short-term or long-term health risk guidelines. Laboratory data show that no ASSET well that was sampled during the Fiscal Year 2010 monitoring of the Carrizo-Wilcox aquifer exceeded an MCL. The data also show that this aquifer is of fairly good quality when considering taste, odor or appearance guidelines, with 18 SMCLs exceeded in 11 wells.

Comparison to ASSET derived historical data, current data show some change in the quality or characteristics of the Carrizo-Wilcox aquifer, with 8 parameters showing consistent increases in average concentration, 9 parameters decreasing in average concentration, and the remaining parameters showing no consistent change over the previous 15 years.

It is recommended that the wells assigned to the Carrizo-Wilcox aquifer be resampled as planned, in approximately three years. In addition, several wells should be added to the 12 currently in place to increase the well density for this aquifer.

¹ Classification based on hardness scale from: Peavy, H. S. et al. *Environmental Engineering*. New York: McGraw-Hill, 1985.

Table 2-1: List of Wells Sampled, Carrizo-Wilcox Aquifer–FY 2010

DOTD Well Number	Parish	Date	Owner	Depth (Feet)	Well Use
BI-236	Bienville	9/28/2009	Alberta Water System	410	Public Supply
BO-274	Bossier	9/28/2009	Village Water System	395	Public Supply
BO-7274Z	Bossier	11/4/2009	Private Owner	290	Domestic
CD-453	Caddo	11/4/2009	City of Vivian	228	Public Supply
CD-630	Caddo	11/3/2009	Private Owner	240	Irrigation
CD-639	Caddo	11/3/2009	SI Precast	200	Industrial
CD-642	Caddo	11/3/2009	Louisiana Lift	210	Industrial
DS-384	De Soto	10/5/2009	City of Mansfield	293	Public Supply
DS-5297Z	De Soto	10/13/2009	Private Owner	170	Domestic
DS-5996Z	De Soto	10/5/2009	Private Owner	360	Domestic
RR-5070Z	Red River	9/23/2009	Private Owner	105	Domestic
SA-522	Sabine	8/24/2009	Private Owner	200	Irrigation

Table 2-2: Summary of Field and Conventional Data, Carrizo-Wilcox Aquifer–FY 2010

DOTD Well Number	Temp Deg. C	pH SU	Sp. Cond. mmhos/cm	Sal. ppt	TDS g/L	Alk mg/L	Cl mg/L	Color PCU	Sp. Cond. umhos/cm	SO4 mg/L	TDS mg/L	TSS mg/L	Turb. NTU	NH3 mg/L	Hard. mg/L	Nitrite- Nitrate (as N) mg/L	TKN mg/L	Tot. P mg/L
	LABORATORY DETECTION LIMITS →					2	1.25	1	10	5	10	4	0.3	1	5	0.01	0.3	0.05
	FIELD PARAMETERS					LABORATORY PARAMETERS												
BI-236	23.03	8.84	1.124	0.56	0.731	612	25.1	16.0	1,120	< 5	687	< 4	1.90	< 1	< 5	< 0.01	0.77	1.070
BO-274	21.59	7.06	0.292	0.14	0.190	120	21.7	6.0	280	< 5	214	< 4	5.89	< 1	14	< 0.01	0.95	0.588
BO-274*	21.59	7.06	0.292	0.14	0.190	114	23.4	8.0	283	< 5	209	< 4	5.80	< 1	28	< 0.01	0.77	0.576
BO-7274Z	18.76	8.68	1.442	0.73	0.937	496	198.0	< 1	1,420	< 5	940	8.0	0.88	< 1	16	< 0.01	< 0.3	0.362
CD-453	19.28	8.75	1.138	0.57	0.740	310	17.1	< 1	1,130	32.9	738	< 4	0.54	< 1	16	< 0.01	0.35	0.466
CD-630	20.57	7.49	0.413	0.2	0.269	214	19.1	< 1	424	5	253	< 4	10.50	< 1	40	< 0.01	< 0.3	0.284
CD-639	19.99	8.62	1.169	0.58	0.760	356	181.0	< 1	1,140	< 5	758	36.0	14.00	< 1	< 5	< 0.01	< 0.3	0.306
CD-642	19.72	8.49	0.512	0.25	0.333	248	29.5	< 1	497	< 5	330	< 4	< 0.3	< 1	< 5	< 0.01	< 0.3	0.116
CD-642*	19.72	8.49	0.512	0.25	0.333	250	29.5	< 1	501	< 5	329	< 4	< 0.3	< 1	< 5	< 0.01	< 0.3	0.134
DS-384	19.69	8.78	0.891	0.44	0.579	376	76.0	< 1	871	< 5	449	< 4	0.80	< 1	< 5	< 0.01	< 0.3	0.346
DS-384*	19.69	8.78	0.891	0.44	0.579	384	77.6	< 1	865	< 5	465	< 4	0.80	< 1	< 5	< 0.01	< 0.3	0.335
DS-5297Z	19.28	8.61	1.520	0.77	0.988	298	115.0	< 1	1,460	269.0	913	< 4	< 0.3	< 1	‡< 10	0.234	< 0.3	0.178
DS-5996Z	19.34	8.55	0.688	0.34	0.447	296	27.0	< 1	674	34.8	392	< 4	< 0.3	< 1	< 5	< 0.01	< 0.3	0.246
RR-5070Z	20.09	5.76	0.488	0.24	0.317	22	133.0	< 1	475	< 5	288	< 4	0.88	< 1	64	0.446	0.63	< 0.05
SA-522	21.94	8.65	0.869	0.43	0.565	334	25.3	7.0	849	67.8	485	< 4	0.96	< 1	< 5	< 0.01	‡< 0.6	0.402

*Denotes Duplicate Sample

‡Reported from a Dilution

Shaded cells exceed EPA Secondary Standards

Table 2-3: Summary of Inorganic Data, Carrizo-Wilcox Aquifer–FY 2010

DOTD Well Number	Antimony ug/L	Arsenic ug/L	Barium ug/L	Beryllium ug/L	Cadmium ug/L	Chromium ug/L	Copper ug/L	Iron ug/L	Lead ug/L	Mercury ug/L	Nickel ug/L	Selenium ug/L	Silver ug/L	Thallium ug/L	Zinc ug/L
Laboratory Detection Limits	5	4	5	2	2	4	2	100	1	0.0002	3	5	1	2	6
BI-236	< 5	< 4	11.1	< 2	< 2	< 4	2.9	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
BO-274	< 5	< 4	51.5	< 2	< 2	< 4	10.3	2,510	1.6	< 0.0002	< 3	< 5	< 1	< 2	171.0
BO-274*	< 5	< 4	51.7	< 2	< 2	< 4	2.0	2,400	2.7	< 0.0002	< 3	< 5	< 1	< 2	196.0
BO-7274Z	< 5	< 4	53.4	< 2	< 2	< 4	8.6	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
CD-453	< 5	< 4	38.5	< 2	< 2	< 4	4.1	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
CD-630	< 5	< 4	181.0	< 2	< 2	< 4	< 2	1,000	< 1	< 0.0002	< 3	< 5	< 1	< 2	141.0
CD-639	< 5	< 4	49.1	< 2	< 2	7.2	9.0	1,020	2.0	< 0.0002	4.2	< 5	< 1	< 2	< 6
CD-642	< 5	< 4	20.2	< 2	< 2	< 4	< 2	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
CD-642*	< 5	< 4	19.9	< 2	< 2	< 4	< 2	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
DS-384	< 5	< 4	7.83	< 2	< 2	< 4	6.1	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	10.1
DS-384*	< 5	< 4	13.2	< 2	< 2	< 4	6.7	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	9.5
DS-5297Z	< 5	< 4	48.9	< 2	< 2	< 4	4.0	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
DS-5996Z	< 5	< 4	39.0	< 2	< 2	< 4	7.3	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6
RR-5070Z	< 5	< 4	189.0	< 2	< 2	< 4	2.9	177	< 1	< 0.0002	6.9	< 5	< 1	< 2	36.5
SA-522	< 5	< 4	22.9	< 2	< 2	< 4	< 2	< 100	< 1	< 0.0002	< 3	< 5	< 1	< 2	< 6

*Denotes Duplicate Sample.

Shaded cells exceed EPA Secondary Standards

Table 2-4: FY 2010 Field and Conventional Statistics, ASSET Wells

	PARAMETER	MINIMUM	MAXIMUM	AVERAGE
FIELD	Temperature (°C)	18.76	23.03	20.29
	pH (SU)	5.76	8.84	8.17
	Specific Conductance (mmhos/cm)	0.292	1.520	0.816
	Salinity (ppt)	0.14	0.77	0.41
	TDS (g/L)	0.19	0.988	0.53
LABORATORY	Alkalinity (mg/L)	22	612	295.33
	Chloride (mg/L)	19.1	198	77.21
	Color (PCU)	< 1	16	2.83
	Specific Conductance (umhos/cm)	280	1460	799.27
	Sulfate (mg/L)	< 5	269	28.97
	TDS (mg/L)	209	940	496.67
	TSS (mg/L)	< 4	36	4.67
	Turbidity (NTU)	< 0.3	14	2.90
	Ammonia, as N (mg/L)	< 1	< 1	< 1
	Hardness (mg/L)	< 5	64	13.53
	Nitrite - Nitrate, as N (mg/L)	< 0.01	0.446	0.05
	TKN (mg/L)	< 0.3	0.95	0.33
	Total Phosphorus (mg/L)	< 0.05	1.07	0.36

Table 2-5: FY 2010 Inorganic Statistics, ASSET Wells

	PARAMETER	MINIMUM	MAXIMUM	AVERAGE
	Antimony (ug/L)	< 5	< 5	< 5
	Arsenic (ug/L)	< 4	< 4	< 4
	Barium (ug/L)	7.83	189.00	53.15
	Beryllium (ug/L)	< 2	< 2	< 2
	Cadmium (ug/L)	< 2	< 2	< 2
	Chromium (ug/L)	< 4	7.23	< 4
	Copper (ug/L)	< 2	10.30	4.54
	Iron (ug/L)	< 100	2510.00	507.13
	Lead (ug/L)	< 1	2.68	< 1
	Mercury (ug/L)	< 0.0002	< 0.0002	< 0.0002
	Nickel (ug/L)	< 3	6.92	< 3
	Selenium (ug/L)	< 5	< 5	< 5
	Silver (ug/L)	< 1	< 1	< 1
	Thallium (ug/L)	< 2	< 2	< 2
	Zinc (ug/L)	< 6	196.00	39.40

Table 2-6: Triennial Field and Conventional Statistics, ASSET Wells

PARAMETER		AVERAGE VALUES BY FISCAL YEAR					
		FY 1995	FY 1998	FY 2001	FY 2004	FY 2007	FY 2010
FIELD	Temperature (°C)	21.44	21.30	21.98	21.39	21.83	20.29
	pH (SU)	7.53	7.65	7.87	7.75	8.31	8.17
	Specific Conductance (mmhos/cm)	0.676	0.732	0.808	0.800	0.740	0.816
	Salinity (Sal.) (ppt)	0.35	0.36	0.40	0.39	0.36	0.41
	TDS (Total dissolved solids) (g/L)	-	-	-	0.520	0.480	0.530
LABORATORY	Alkalinity (Alk.) (mg/L)	267.2	251.5	249.4	273.5	283.4	295.3
	Chloride (Cl) (mg/L)	59.2	71.6	69.7	66.5	66.4	77.21
	Color (PCU)	25.8	13.8	24.1	14.8	8.2	2.8
	Specific Conductance (umhos/cm)	726.4	772.4	748.1	799.5	739	799.3
	Sulfate (SO4) (mg/L)	30.1	30.5	28.7	26.6	13.1	28.9
	TDS (Total dissolved solids) (mg/L)	434.7	435.7	449.6	481.2	429.7	496.7
	TSS (Total suspended solids) (mg/L)	<4	4.9	<4	<4	<4	4.7
	Turbidity (Turb.) (NTU)	2.6	5.2	2.3	1.6	1.9	2.9
	Ammonia, as N (NH3) (mg/L)	0.42	0.64	0.64	0.81	0.63	< 1
	Hardness (mg/L)	52.4	42.2	31.3	41.0	33.5	13.5
	Nitrite - Nitrate, as N (mg/L)	0.08	0.07	0.07	0.07	0.10	0.05
	TKN (mg/L)	0.78	0.96	0.82	0.97	0.77	0.33
	Total Phosphorus (P) (mg/L)	0.29	0.24	0.26	0.33	0.26	0.36

Table 2-7: Triennial Inorganic Statistics, ASSET Wells

PARAMETER		AVERAGE VALUES BY FISCAL YEAR					
		FY 1995	FY 1998	FY 2001	FY 2004	FY 2007	FY 2010
Antimony (ug/L)		<5	<5	<5	<5	<1	< 5
Arsenic (ug/L)		5.13	<5	<5	<5	<3	< 4
Barium (ug/L)		51.9	75	69.5	77.8	70.2	53.2
Beryllium (ug/L)		<2	<2	<2	<1	<1	< 2
Cadmium (ug/L)		<2	<2	<2	<1	<0.5	< 2
Chromium (ug/L)		<5	<5	<5	<5	<3	< 4
Copper (ug/L)		31.6	24.7	6.9	5.7	3.1	4.5
Iron (ug/L)		1,521.8	1,896.9	1,352.8	1,897	132.3	507.13
Lead (ug/L)		<10	<10	<10	10.2	<3	< 1
Mercury (ug/L)		<0.05	<0.05	<0.05	<0.05	<0.05	< 0.0002
Nickel (ug/L)		13.1	<5	12.8	5.2	<3	< 3
Selenium (ug/L)		<5	<5	<5	<5	<4	< 5
Silver (ug/L)		<1	1.1	15.8	<1	<0.5	< 1
Thallium (ug/L)		<5	<5	<5	<5	<1	< 2
Zinc (ug/L)		33.5	164	60.4	135.4	21.9	39.4

Table 2-8: VOC Analytical Parameters

COMPOUND	METHOD	DETECTION LIMIT (ug/L)
ETHYL BENZENE	624	0.5
CIS-1,3-DICHLOROPROPENE	624	0.5
TRANS-1,3-DICHLOROPROPENE	624	0.5
1,4-DICHLOROBENZENE	624	0.5
1,2-DICHLOROETHANE	624	0.5
TOLUENE	624	0.5
CHLOROBENZENE	624	0.5
DIBROMOCHLOROMETHANE	624	0.5
TETRACHLOROETHYLENE (PCE)	624	0.5
TRANS-1,2-DICHLOROETHENE	624	0.5
TERT-BUTYL METHYL ETHER	624	0.5
1,3-DICHLOROBENZENE	624	0.5
CARBON TETRACHLORIDE	624	0.5
CHLOROFORM	624	0.5
BENZENE	624	0.5
1,1,1-TRICHLOROETHANE	624	0.5
BROMOMETHANE	624	0.5
CHLOROMETHANE	624	0.5
CHLOROETHANE	624	0.5
VINYL CHLORIDE	624	0.5
METHYLENE CHLORIDE	624	0.5
BROMOFORM	624	0.5
BROMODICHLOROMETHANE	624	0.5
1,1-DICHLOROETHANE	624	0.5
1,1-DICHLOROETHENE	624	0.5
TRICHLOROFLUOROMETHANE	624	0.5
1,2-DICHLOROPROPANE	624	0.5
1,1,2-TRICHLOROETHANE	624	0.5
TRICHLOROETHYLENE (TCE)	624	0.5
1,1,2,2-TETRACHLOROETHANE	624	0.5
1,2,3-TRICHLOROBENZENE	624	0.5
1,2-DICHLOROBENZENE	624	0.5
ETHYL BENZENE	624	0.5
CIS-1,3-DICHLOROPROPENE	624	0.5

Table 2-9: SVOC Analytical Parameters

COMPOUND	METHOD	DETECTION LIMIT (ug/L)
1,2,4-TRICHLOROBENZENE	625	5
2,4,6-TRICHLOROPHENOL	625	5
2,4-DICHLOROPHENOL	625	5
2,4-DIMETHYLPHENOL	625	5
2,4-DINITROPHENOL	625	20
2,4-DINITROTOLUENE	625	5
2,6-DINITROTOLUENE	625	5
2-CHLORONAPHTHALENE	625	5
2-CHLOROPHENOL	625	5
2-NITROPHENOL	625	10
3,3'-DICHLOROBENZIDINE	625	5
4,6-DINITRO-2-METHYLPHENOL	625	10
4-BROMOPHENYL PHENYL ETHER	625	5
4-CHLORO-3-METHYLPHENOL	625	5
4-CHLOROPHENYL PHENYL ETHER	625	5
4-NITROPHENOL	625	20
ACENAPHTHENE	625	5
ACENAPHTHYLENE	625	5
ANTHRACENE	625	5
BENZIDINE	625	20
BENZO(A)ANTHRACENE	625	5
BENZO(A)PYRENE	625	5
BENZO(B)FLUORANTHENE	625	5
BENZO(G,H,I)PERYLENE	625	5
BENZO(K)FLUORANTHENE	625	5
BENZYL BUTYL PHTHALATE	625	5
BIS(2-CHLOROETHOXY) METHANE	625	5
HEXACHLOROCYCLOPENTADIENE	625	5
HEXACHLOROETHANE	625	5
INDENO(1,2,3-C,D)PYRENE	625	5
ISOPHORONE	625	5
NAPHTHALENE	625	5
NITROBENZENE	625	5
N-NITROSODIMETHYLAMINE	625	5
N-NITROSODI-N-PROPYLAMINE	625	5
N-NITROSODIPHENYLAMINE	625	5

Table 2-9: SVOCs (Continued)

COMPOUND	METHOD	DETECTION LIMIT (ug/L)
PENTACHLOROBENZENE	625	5
PENTACHLOROPHENOL	625	10
PHENANTHRENE	625	5
PHENOL	625	5
PYRENE	625	5
TETRACHLOROBENZENE(S), TOTAL	625	10

Table 2-10: Pesticides and PCBs

COMPOUND	METHOD	DETECTION LIMITS (ug/L)
4,4'-DDD	8081	0.1
4,4'-DDE	8081	0.1
4,4'-DDT	8081	0.1
Aldrin	8081	0.05
Alpha-Chlordane	8081	0.05
alpha-BHC	8081	0.05
beta-BHC	8081	0.05
delta-BHC	8081	0.05
gamma-BHC	8081	0.05
Dieldrin	8081	0.1
Endosulfan I	8081	0.05
Endosulfan II	8081	0.1
Endosulfan Sulfate	8081	0.1
Endrin	8081	0.1
Endrin Aldehyde	8081	0.1
Endrin Ketone	8081	0.1
Heptachlor	8081	0.05
Heptachlor Epoxide	8081	0.05
Methoxychlor	8081	0.5
Toxaphene	8081	2
Gamma-Chlordane	8081	0.05
PCB-1016	8082	1
PCB-1221	8082	1
PCB-1232	8082	1
PCB-1242	8082	1
PCB-1248	8082	1
PCB-1254	8082	1
PCB-1260	8082	1

Figure 2-1: Location Plat, Carrizo-Wilcox Aquifer

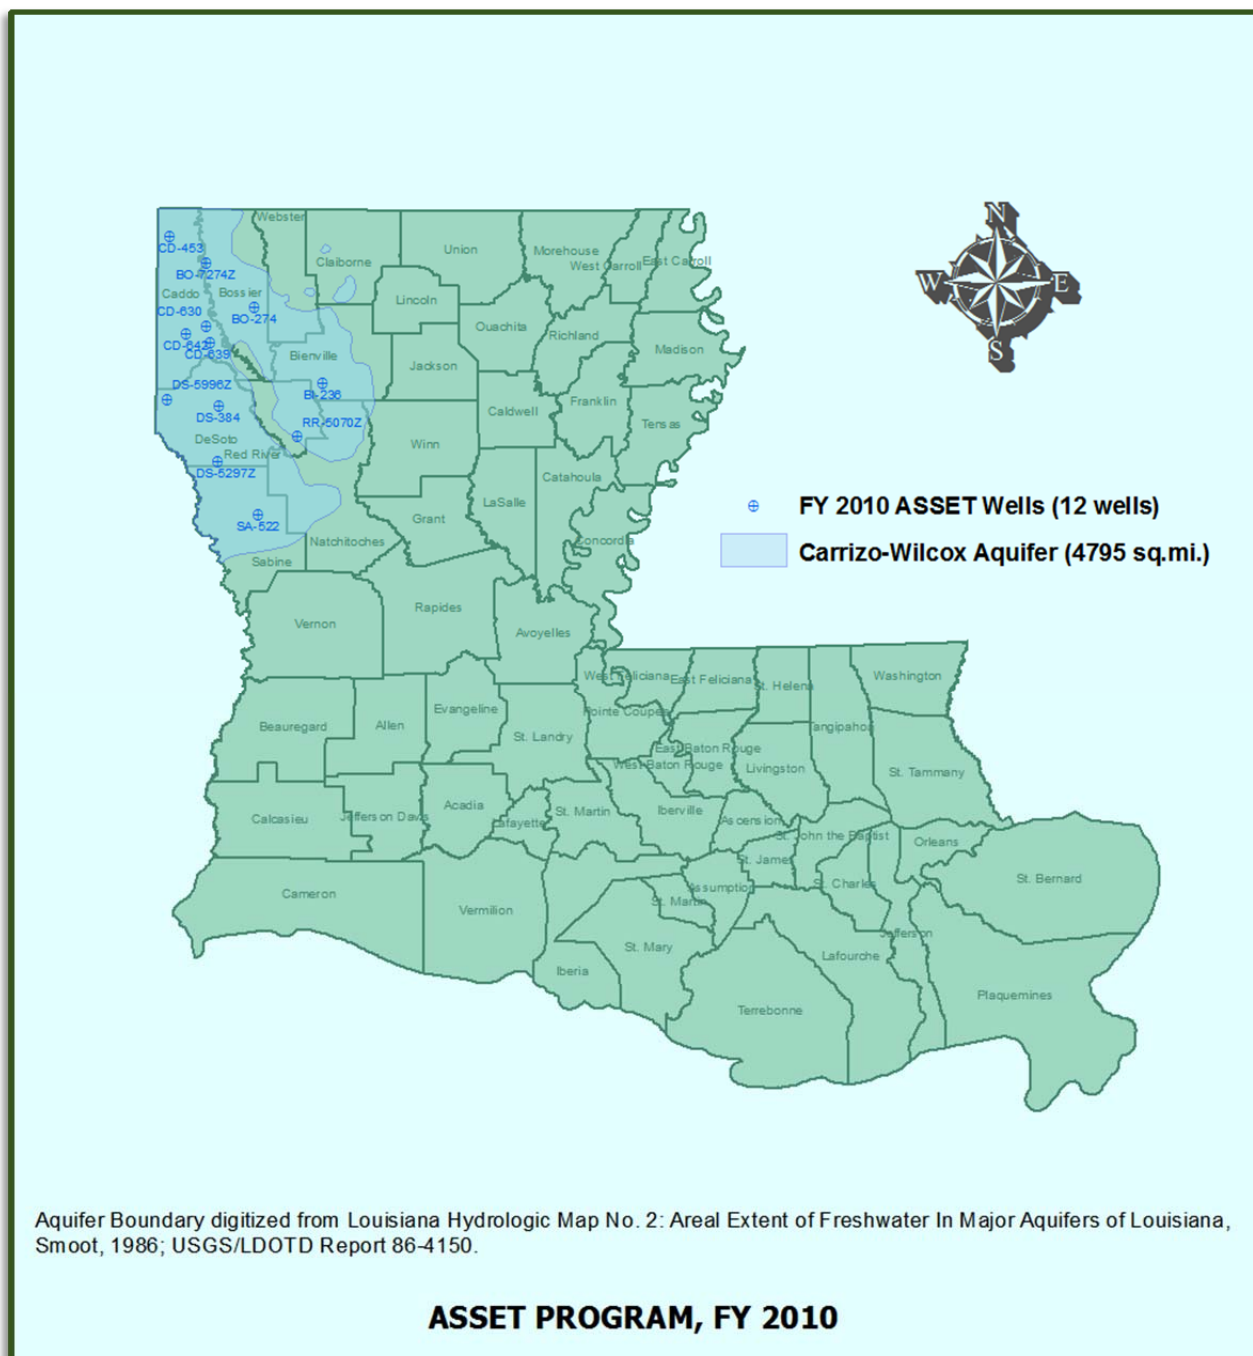


Figure 2-2: Map of pH Data

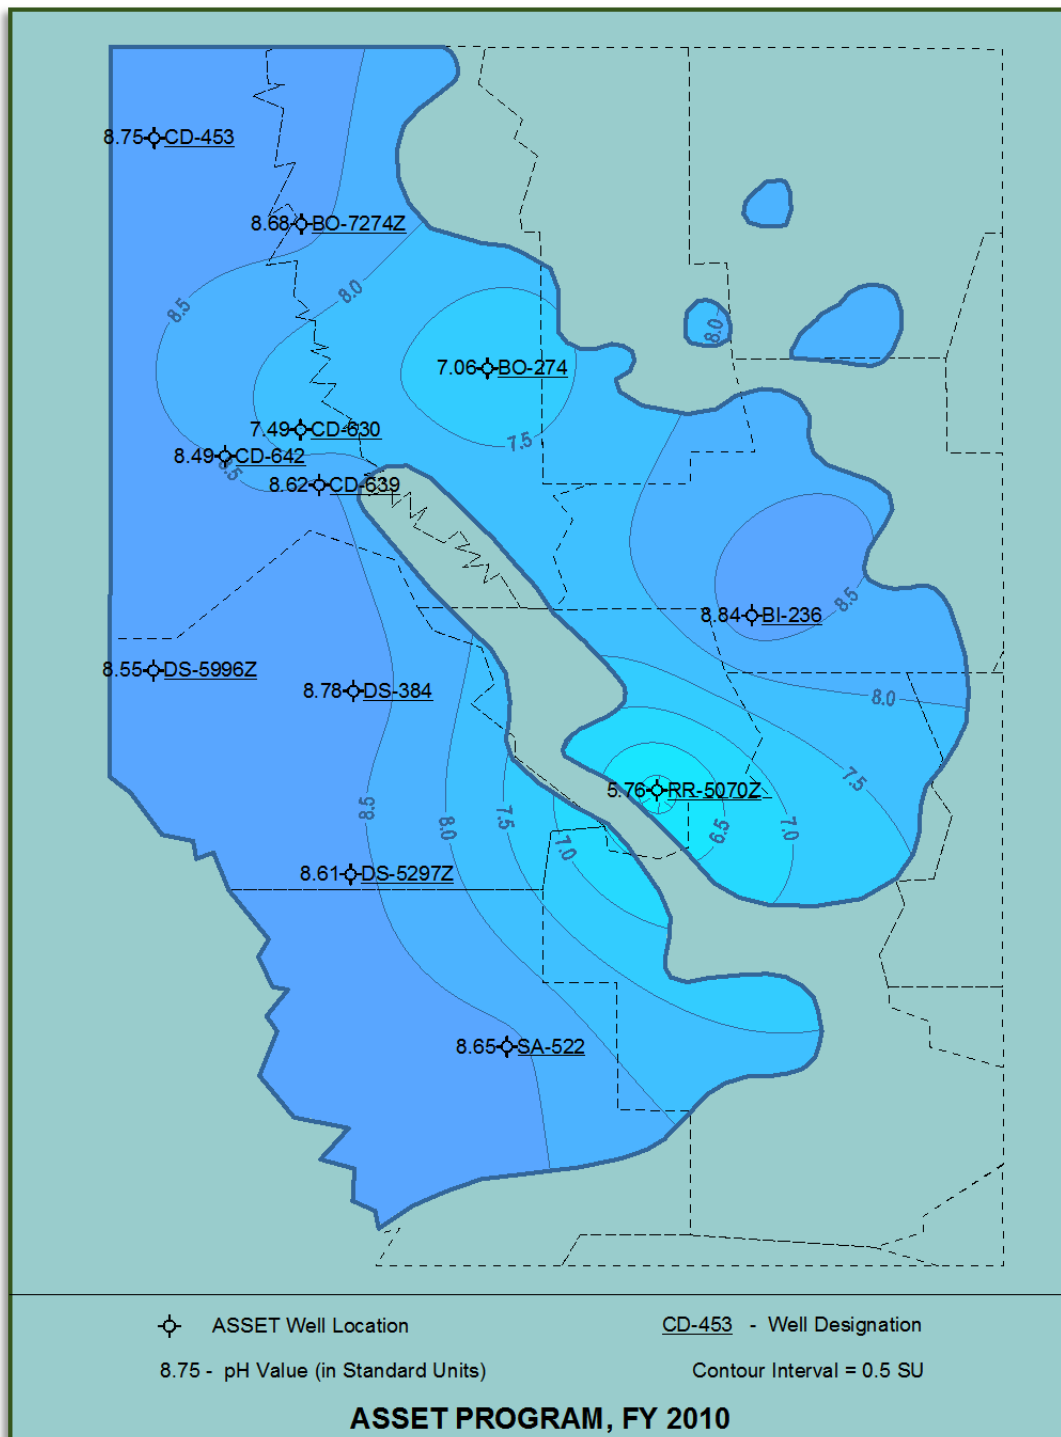


Figure 2-3: Map of TDS Lab Data

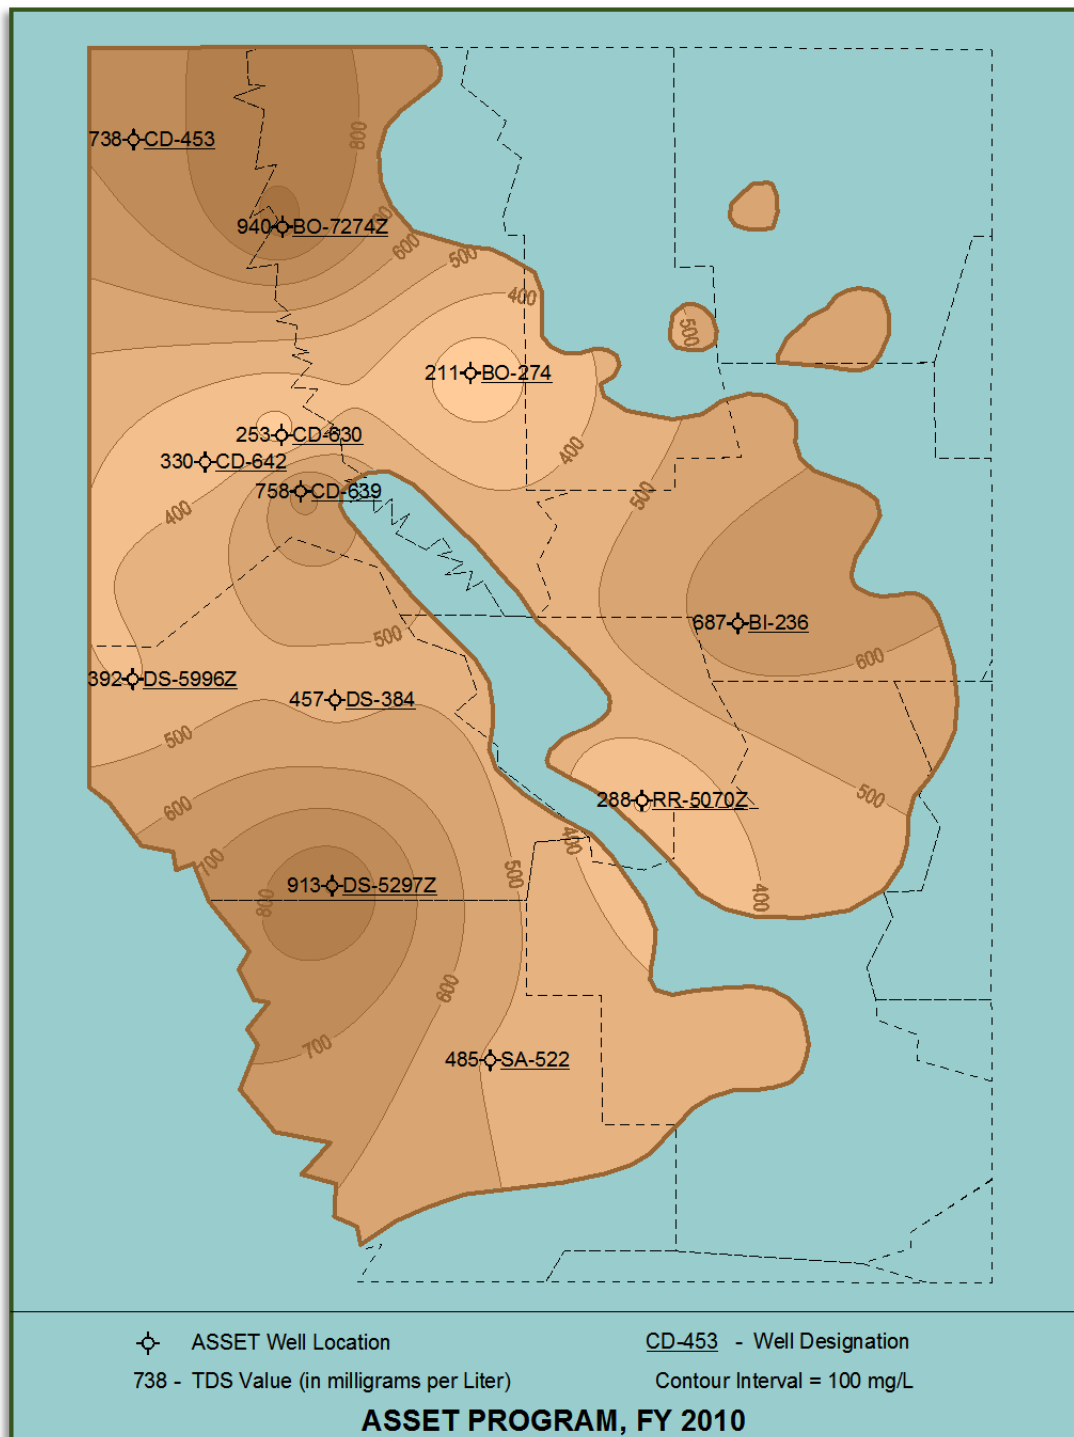


Figure 2-4: Map of Chloride Data

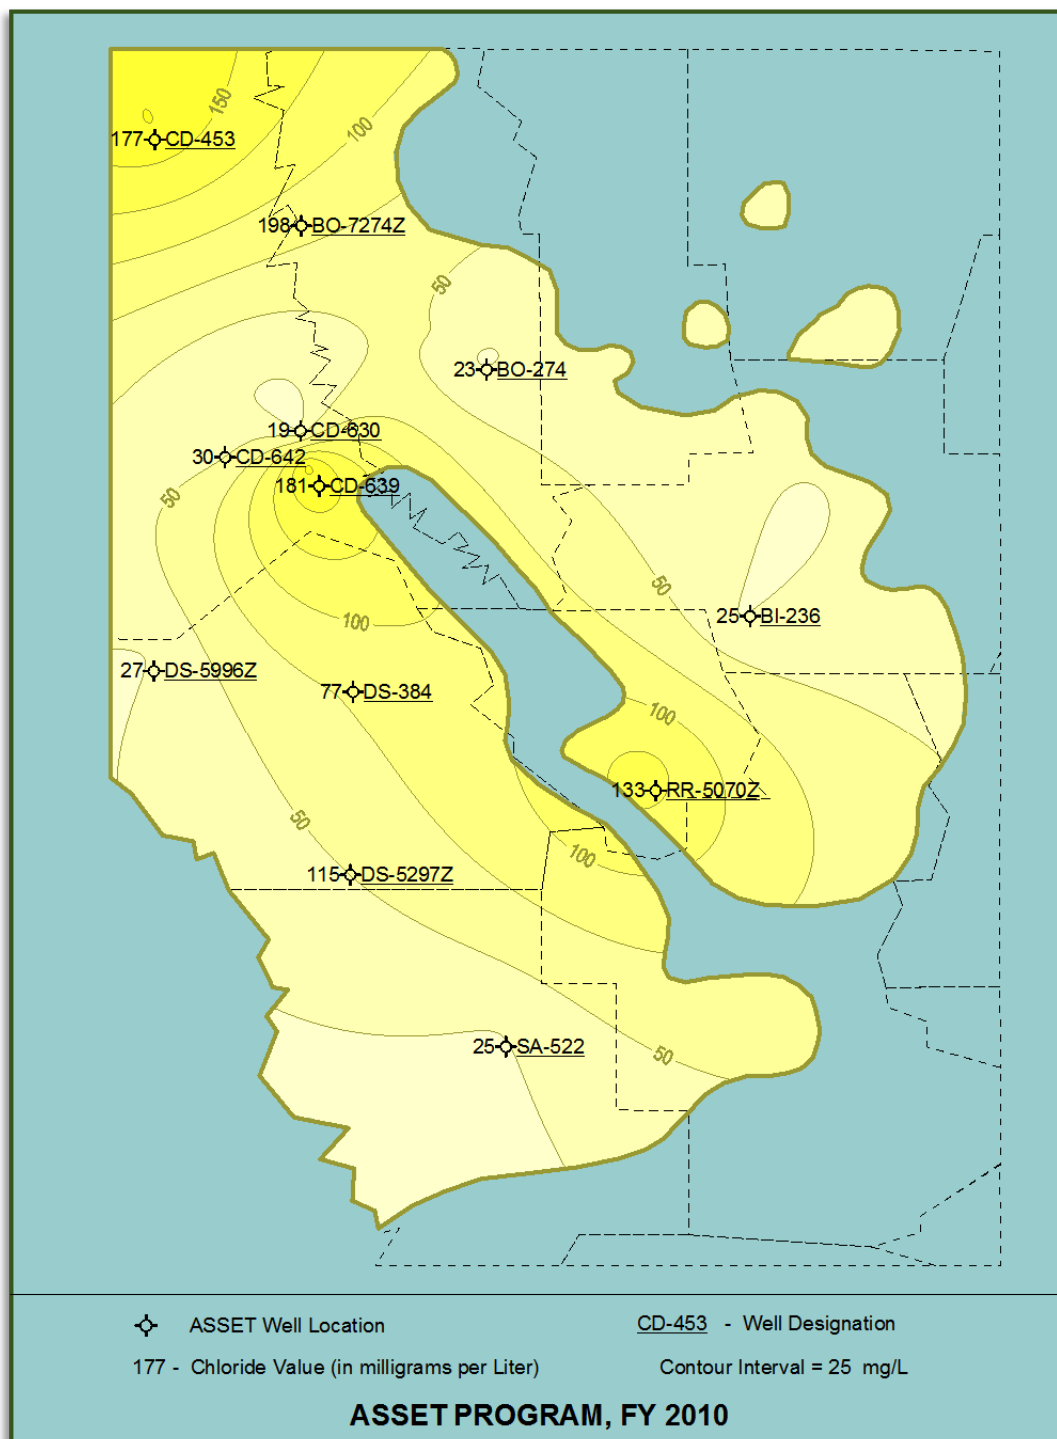


Figure 2-5: Map of Iron Data

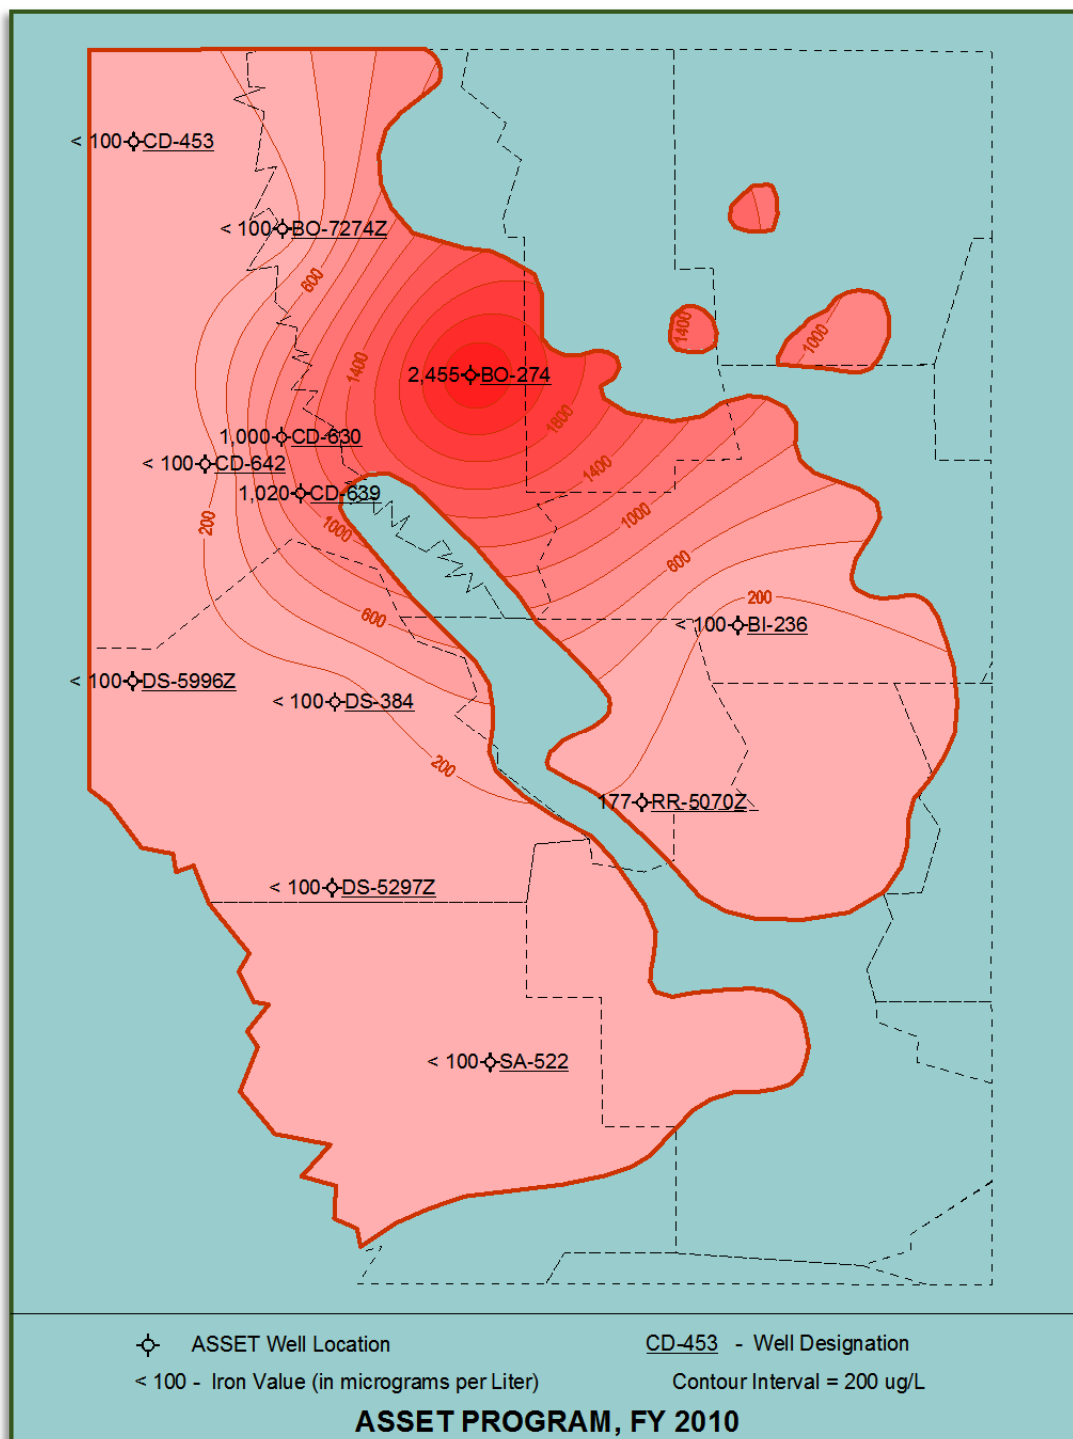


Chart 2-1: Temperature Trend

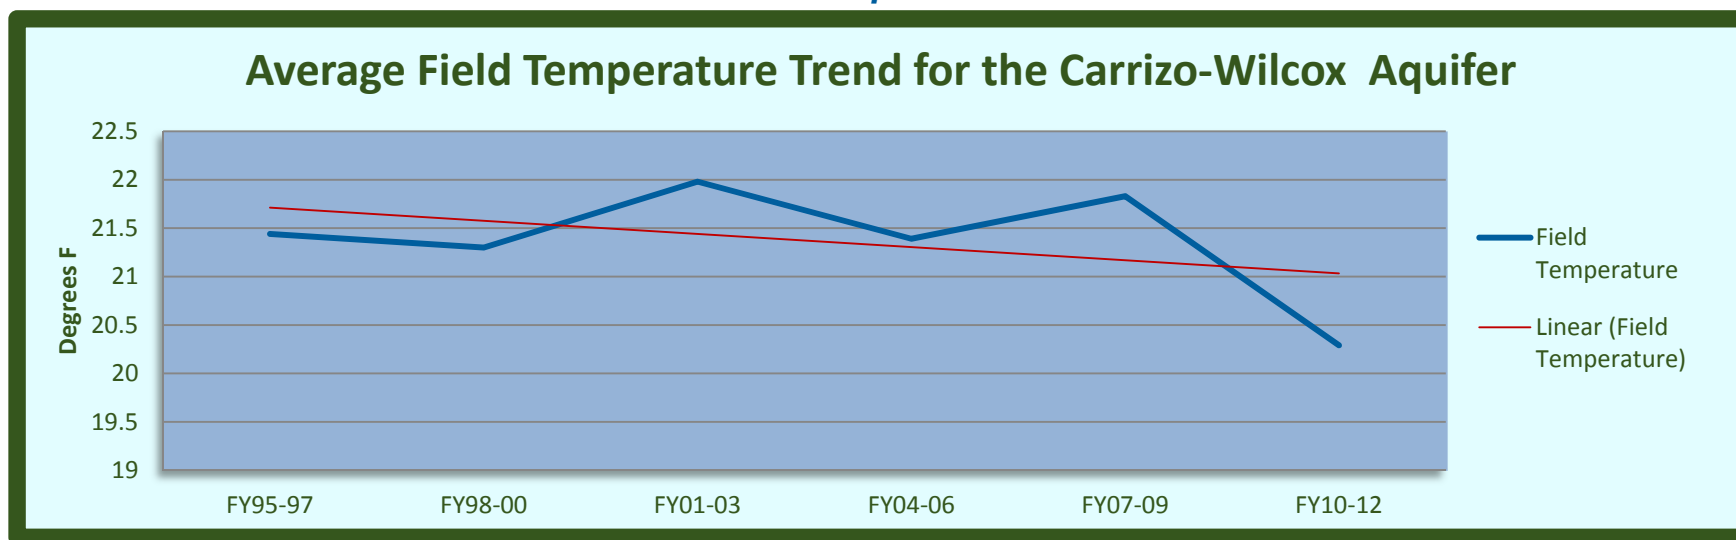


Chart 2-2: pH Trend

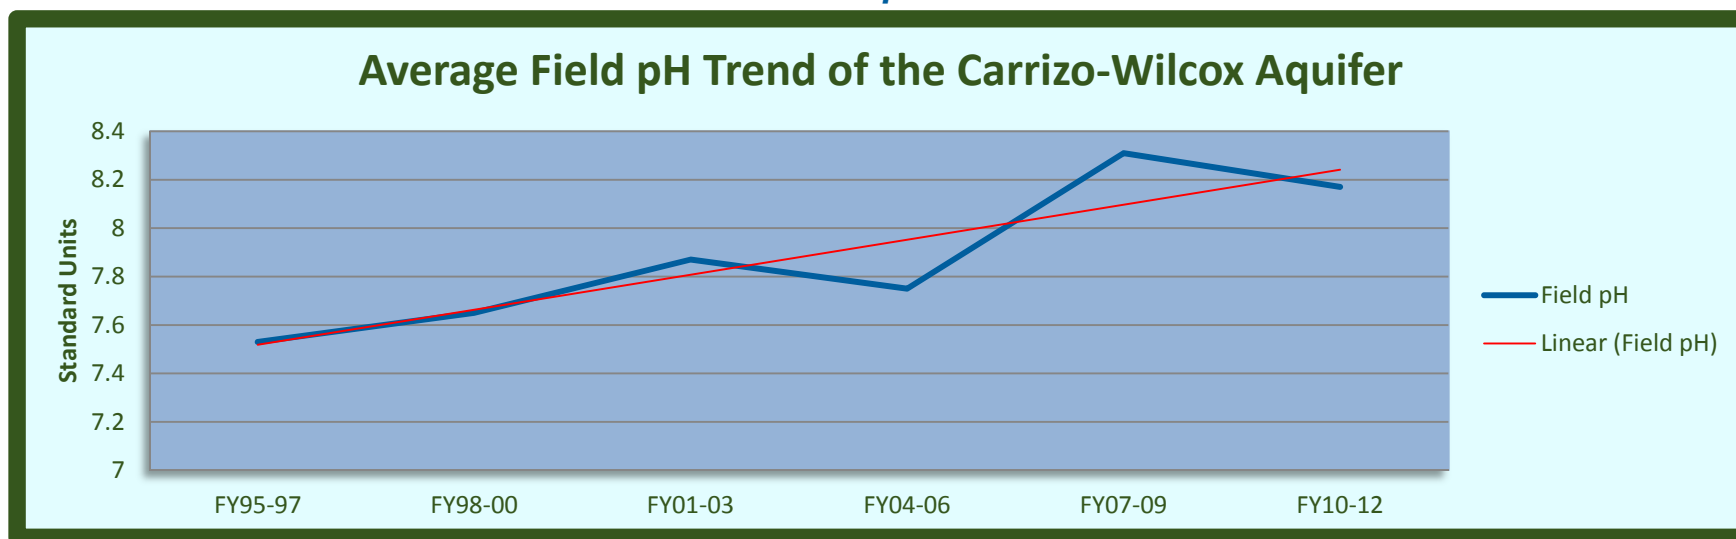


Chart 2-3: Field Specific Conductance Trend

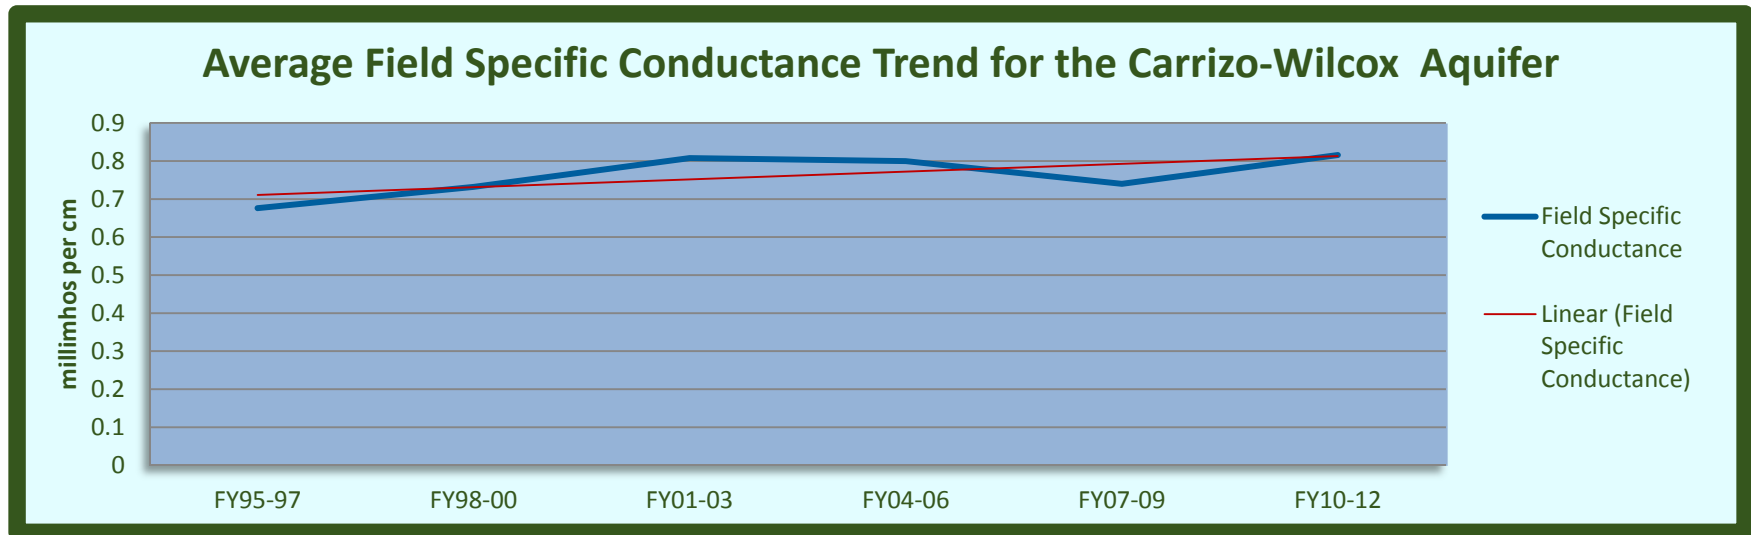


Chart 2-4: Lab Specific Conductance Trend

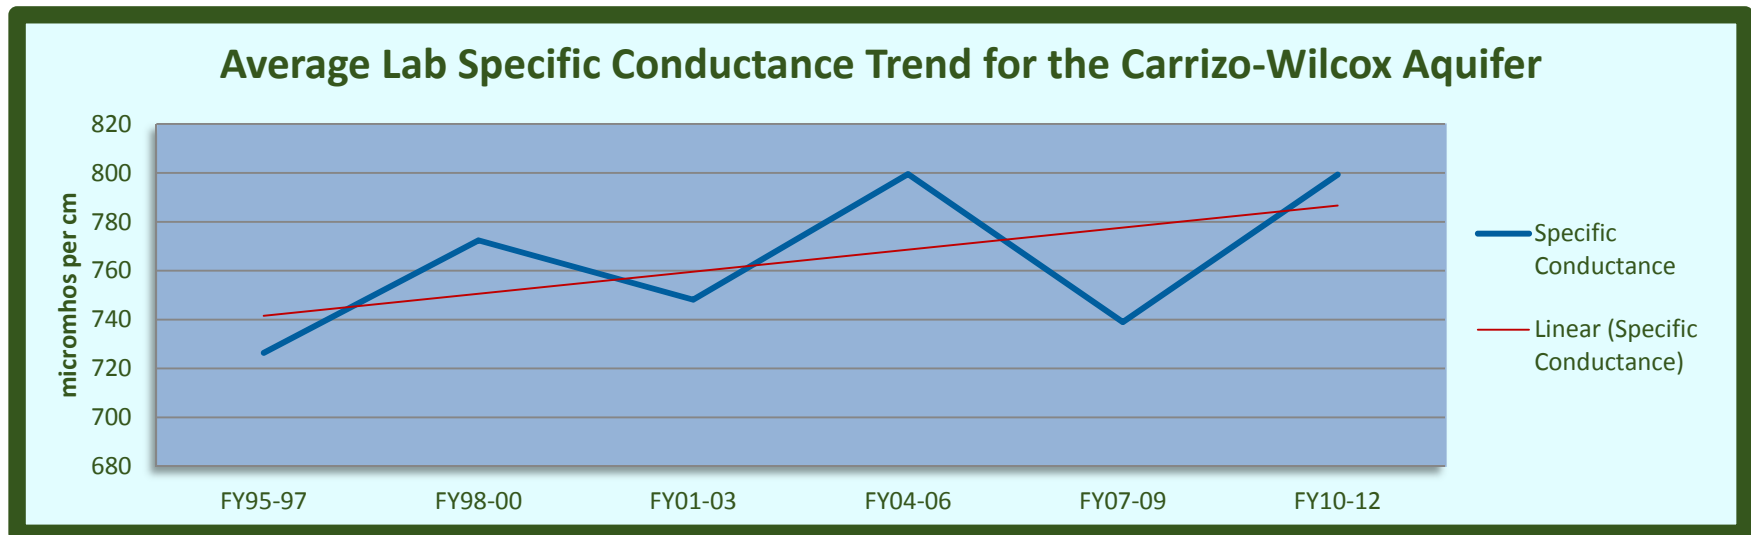


Chart 2-5: Field Salinity Trend

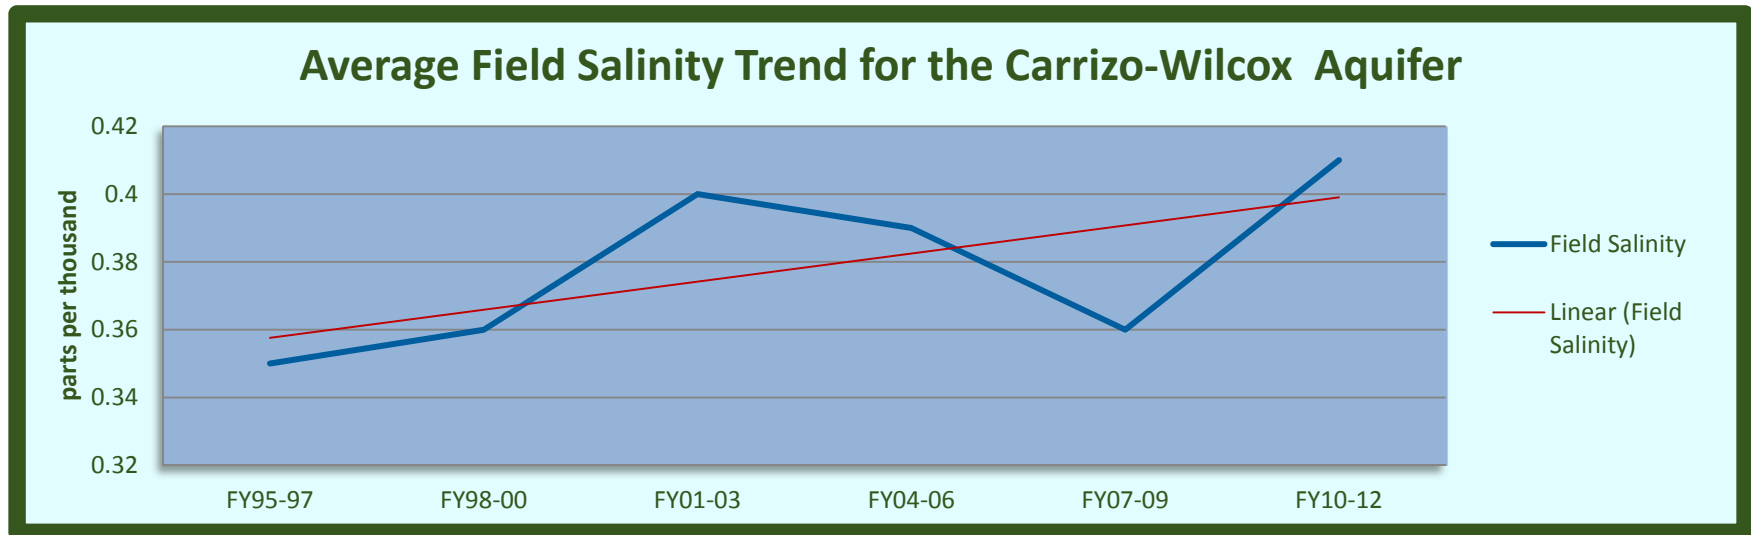


Chart 2-6: Alkalinity Trend

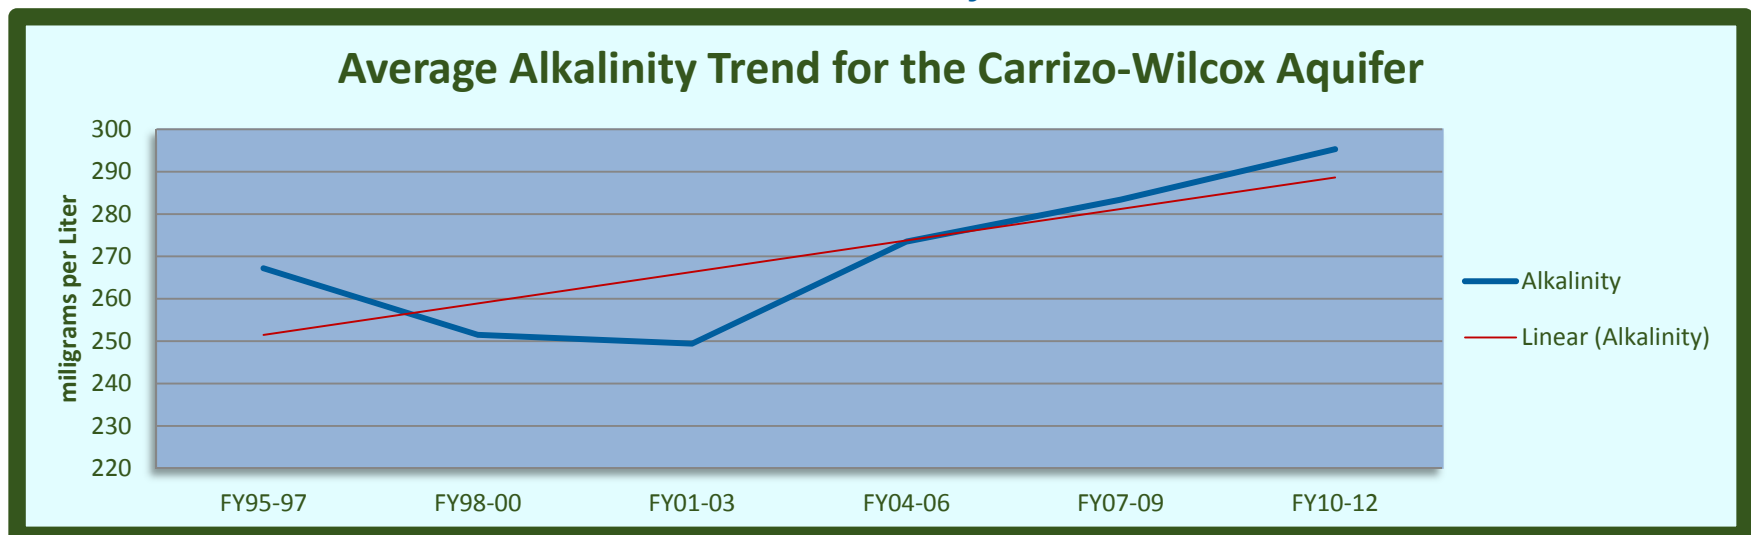


Chart 2-7: Chloride Trend

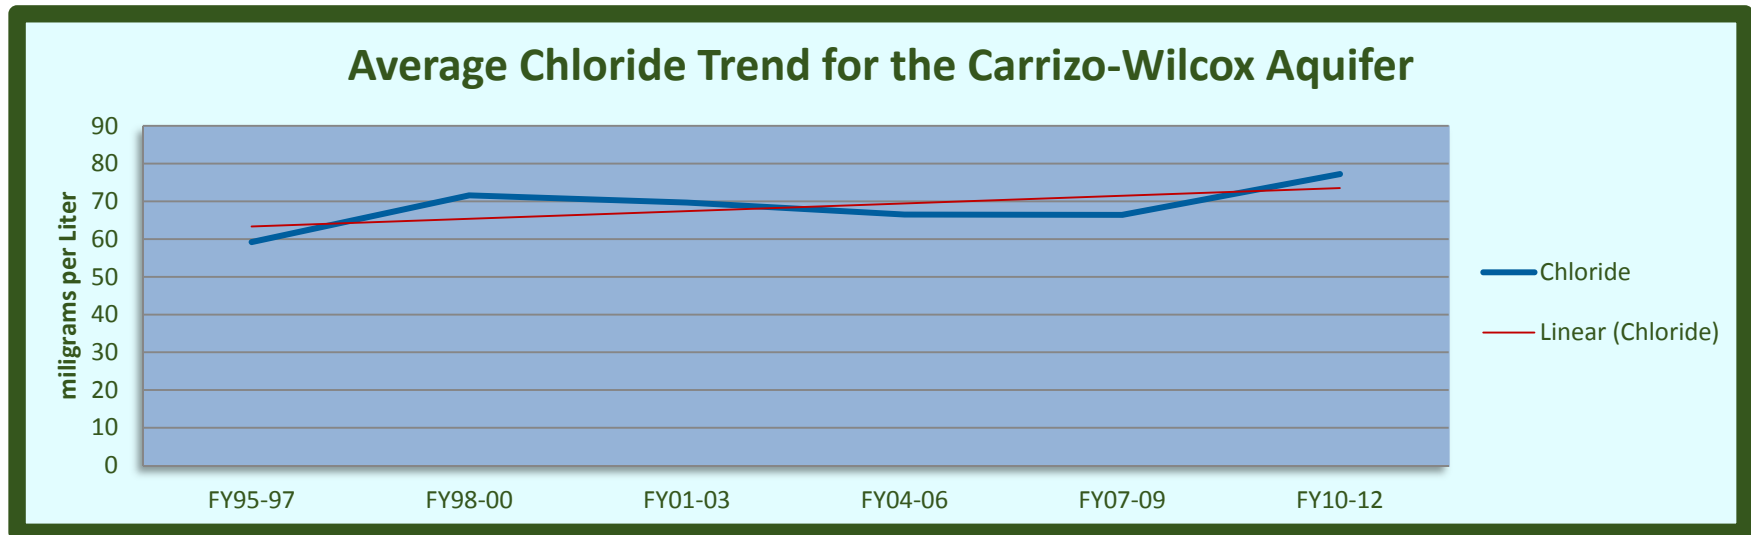


Chart 2-8: Color Trend

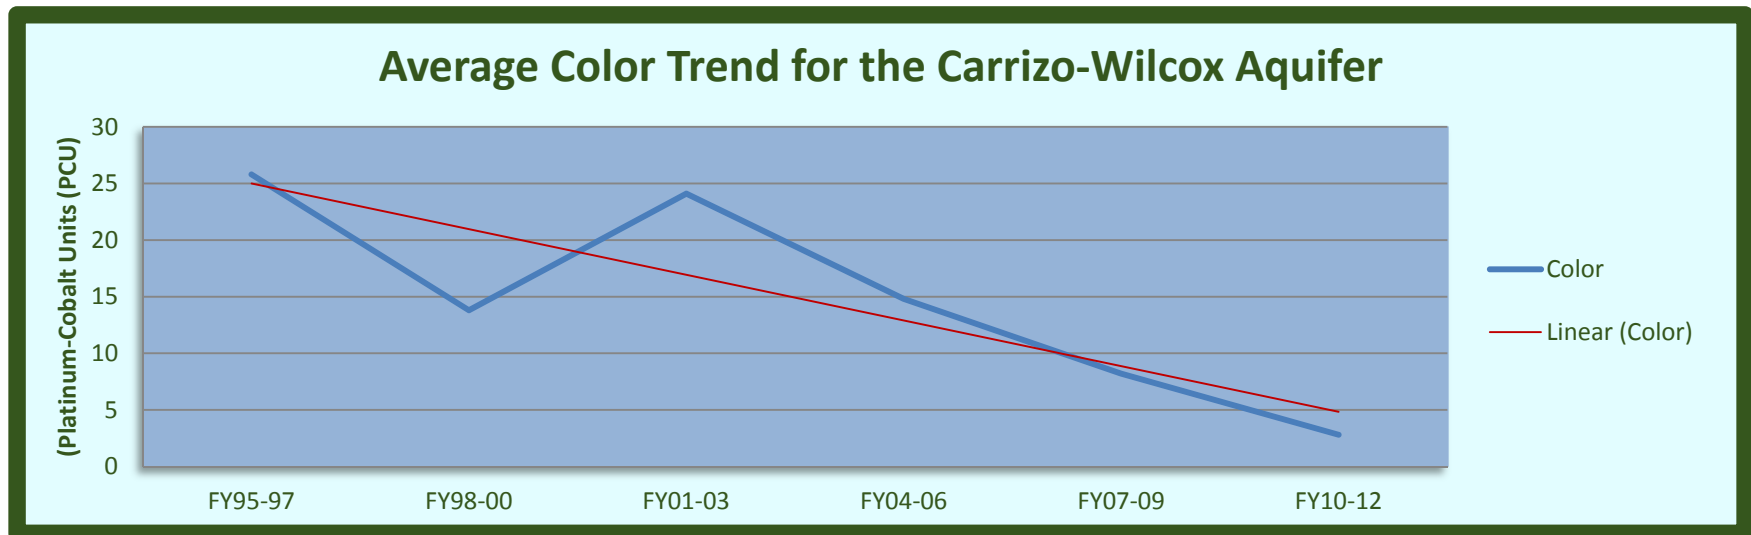


Chart 2-9: Sulfate (SO₄) Trend

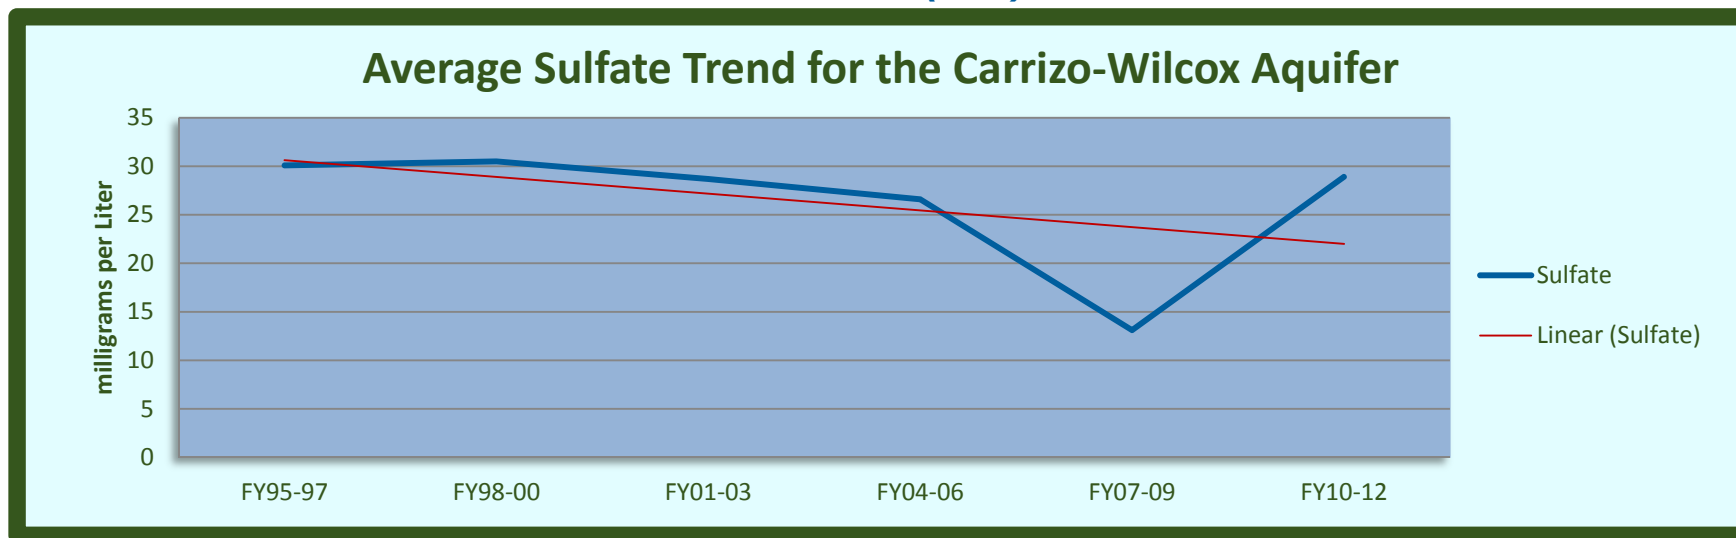


Chart 2-10: Total Dissolved Solids (TDS) Trend

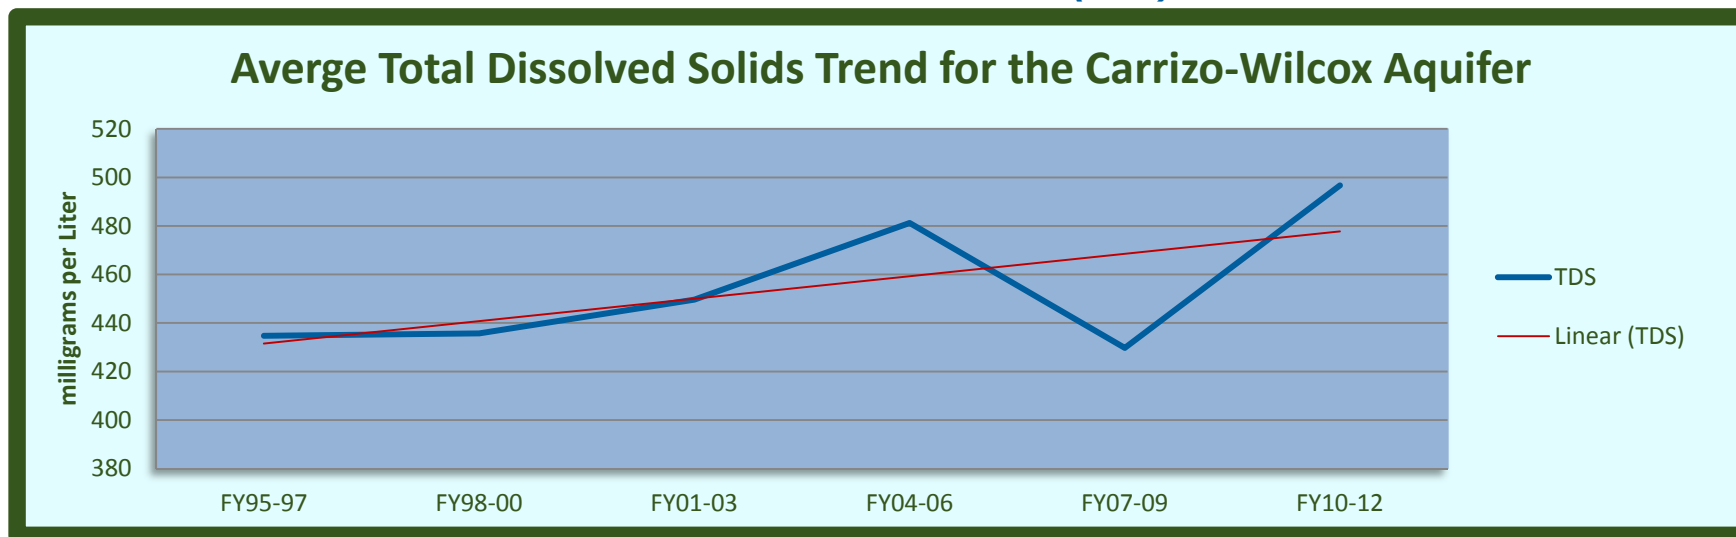


Chart 2-11: Ammonia (NH₃) Trend

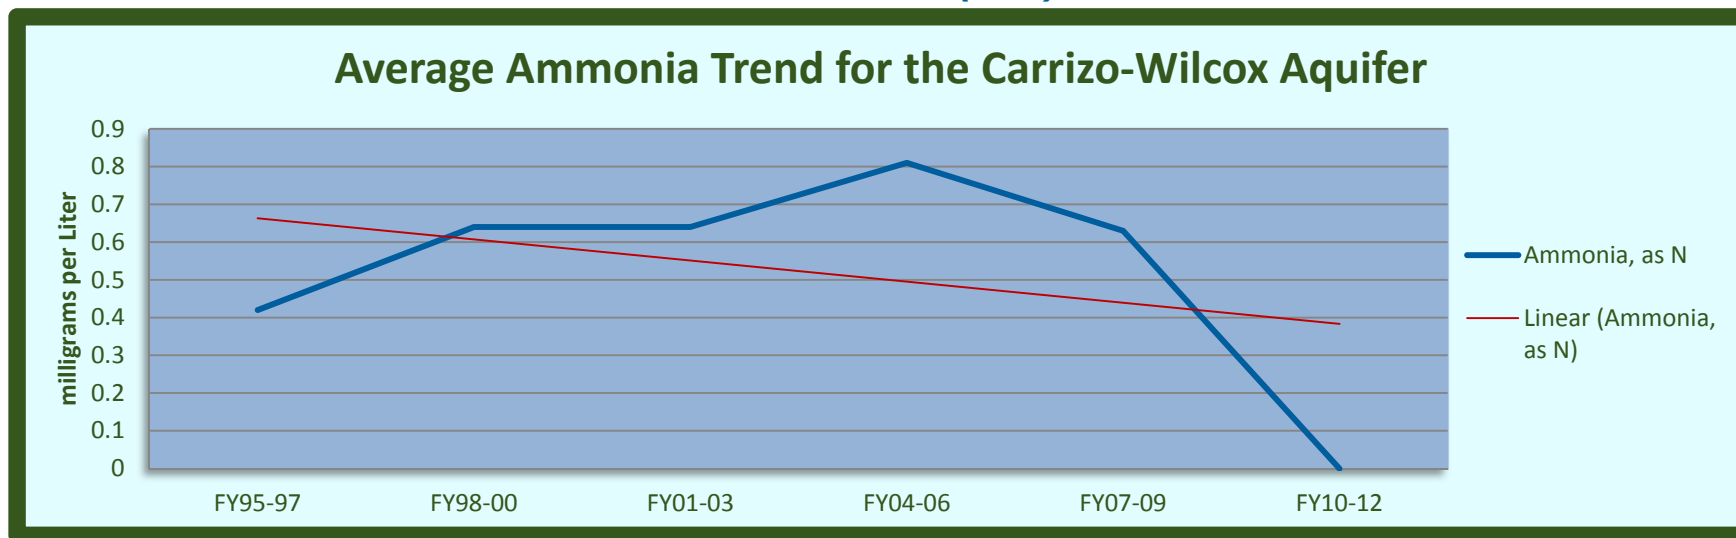


Chart 2-12: Hardness Trend

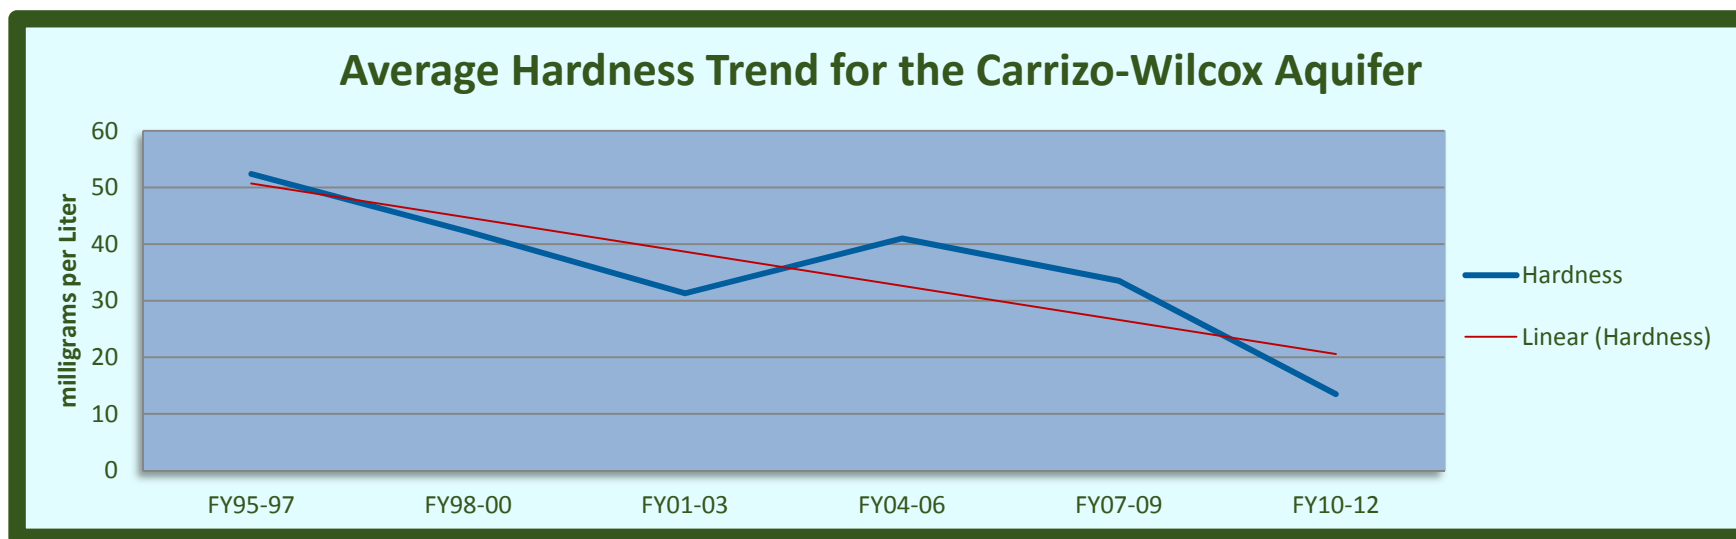


Chart 2-13: Nitrite – Nitrate Trend

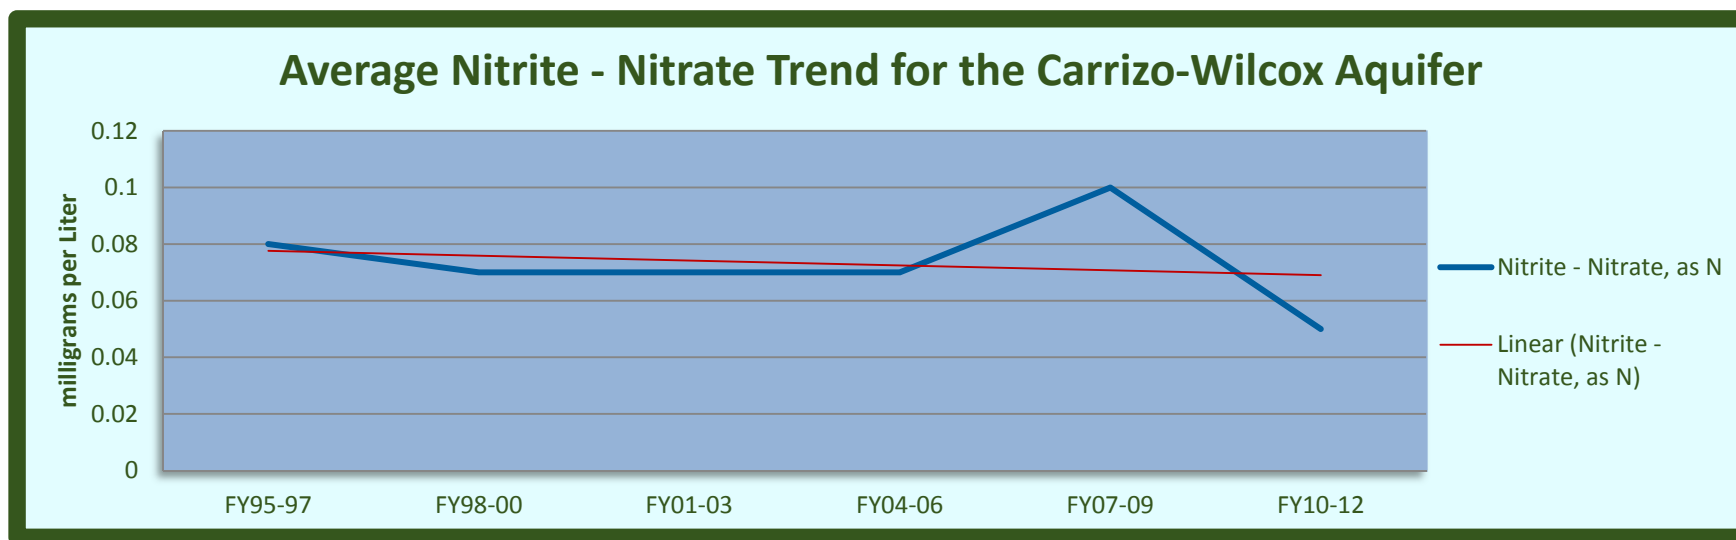


Chart 2-14: TKN Trend

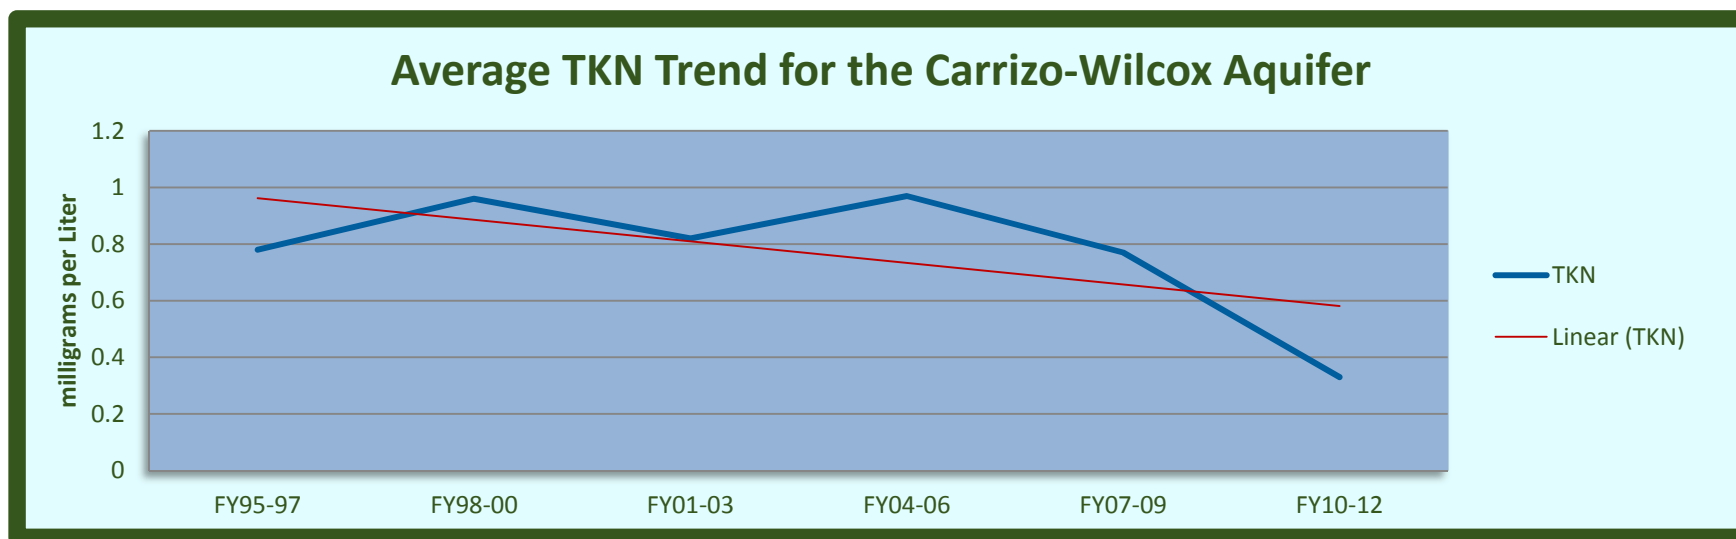


Chart 2-15: Total Phosphorus Trend

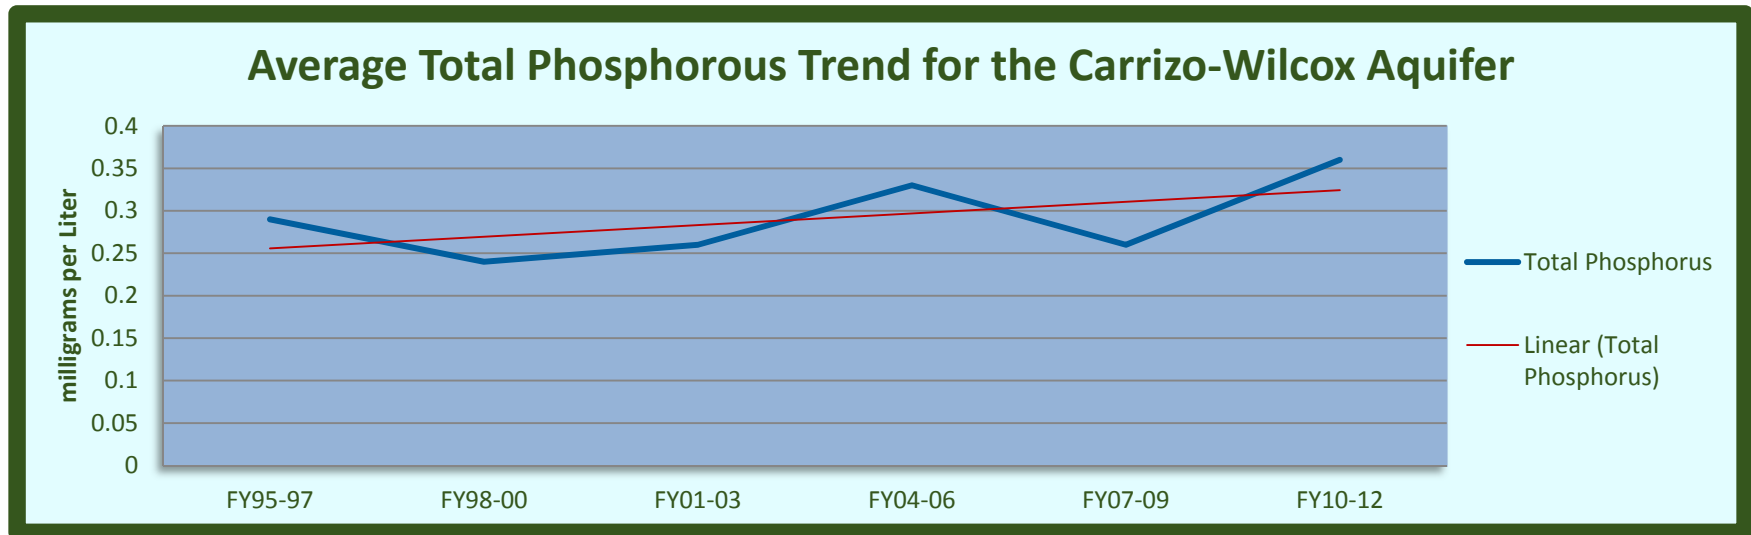


Chart 2-16: Iron Trend

